

# EPWL "LOGISTIC" PALLET-WEIGHING FLOOR SCALES SERIES




**EPWL with optional column**

NOTES: weight indicator is suitable for installation on the table, column, wall or attached to the structure.

## DIMENSIONS mm

- Values in mm

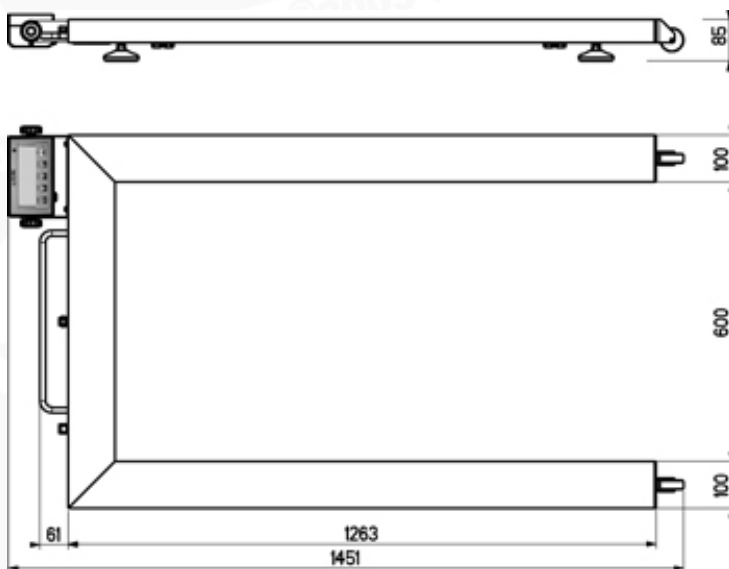

Quick and accurate pallet weighing scales, easy to use and transport. Integrated extractable weight indicator complete of stretchable connection cable which may be easily positioned according to one's weighing requirements. Functions with a built-in battery with extractable drawer for easy substitution. The automatic multirange capacity allows the maximum accuracy on the lower weight values, maintaining the same load capacity. Available also in dual range APPROVED version, for legal for trade use.

## MAIN FEATURES

- Weight indicator with support bracket having an adjustable inclination, for use on the table, column, or wall.
- **LCD 25mm backlit display** with 6 high contrast digits and icons for indication of active functions.
- **ABS IP54 case**, easy to clean and resistant in harsh and corrosive environments.
- Waterproof 5-key functional keypad.
- **Functions with 4 shear beam 1000 Ohm aluminium load cells** approved according to OIML R60 C3 standards (3000+3000 divisions), IP67 protection degree, able to handle double the nominal load.
- Carbon steel oven-fire painted bearing structure, complete of adjustable feet.
- Level, wheels, and transport handle.
- Connection cable to the indicator, 3 m long.
- Accuracy:  $\pm 0,05\%$  of the capacity.
- Programmable automatic switch-off.
- Digital calibration and Set-Up from keypad or from PC through DINITOOLS.
- Power supply from 5 to 12 Vdc
- Standard fitted with extractable drawer for housing 4 AA batteries (not included), which may be rechargeable, and standard connector for connection to external power adapter (if connected, it excludes the battery power).

## SELECTABLE AND KEYPAD FUNCTIONS

- Clearing; automatic and manual tare, print.
- **X 10 High resolution visualisation.**
- **Net/Gross or lb/kg conversion.**
- **Accumulation.**
- **Formula weighing.**
- **+/- Checkweighing.**
- **Percentage weighing.**
- **Alibi, for approved weight transmission** (optional).
- **Counting.**
- **Input/Output.**

## I/O SECTION:

- RS232/C bidirectional port on RJ connector (or USB optionally) for quick or RS485 connection, configurable for PC, PLC, additional remote display.
- RS232/C bidirectional port for connection to printer or labeller.
- IR input for remote control management.

## AVAILABLE ACCESSORIES

- Remote control.
- Support column for indicator.

## Available models

Code	Dimensions (LxPxH)	Max Capacity kg	Division kg	CE-M2 Division kg
------	--------------------	-----------------	-------------	-------------------

EPWL	1260x800x85	600/1500/2000	0,2/0,5/1	-
EPWLM <b>M</b>	1260x800x85	1000/2000	-	0,5/1

### Options only available at time of order

Code	Description
OBTPRB	Thermal printer in table version for weight indicator, with ABS case, 1,5 m connection cable and internal power adapter.
DFTL	Remote control for use up to 8 m of distance.
DFCLK	Clock and calendar for printing/displaying of the date and time.
ALMEM	Alibi memory (fiscal memory, max 120.000 weighs) for approved transmission of the weight. Clock/calendar integrated for print of the date/time.
RSCBRJ	RS232/C serial cable l= 1,5 m, for the connection of the weight indicator to PC, made up of 9-pole female connector on PC side and RJ connector on indicator side.
USBMB	USB interface, as an alternative of the standard connector RJ, for quick connection of the indicator to PC.
USBCABMB	USB cable for connection between indicator and PC (to be used with USBMB interface).

### Accessories

Code	Description
DGT60BC	Weight indicator-repeater with IP68 stainless steel case, 5-key keypad and 60 mm LED display.
CSP38I	Stainless steel support column for the indicators of the DINI ARGEO and SCALE HOUSE range. Dimensions 520 x 527 mm, 1026 mm high, tubular Ø = 38 mm.
LP542S	Thermal labeller with peel-off system, with 1,5 m RS232 cable for connection to weight indicator, external 100/240 Vac power adapter.
UKPLUG	Power adapter from Schuko to BS1363.
TECMAN	Printed technical manual (free, if downloaded from the web). NET PRICE.
UMAN	Printed user manual (free, if downloaded from the web and available in the CD, fitted with the product). NET PRICE.